
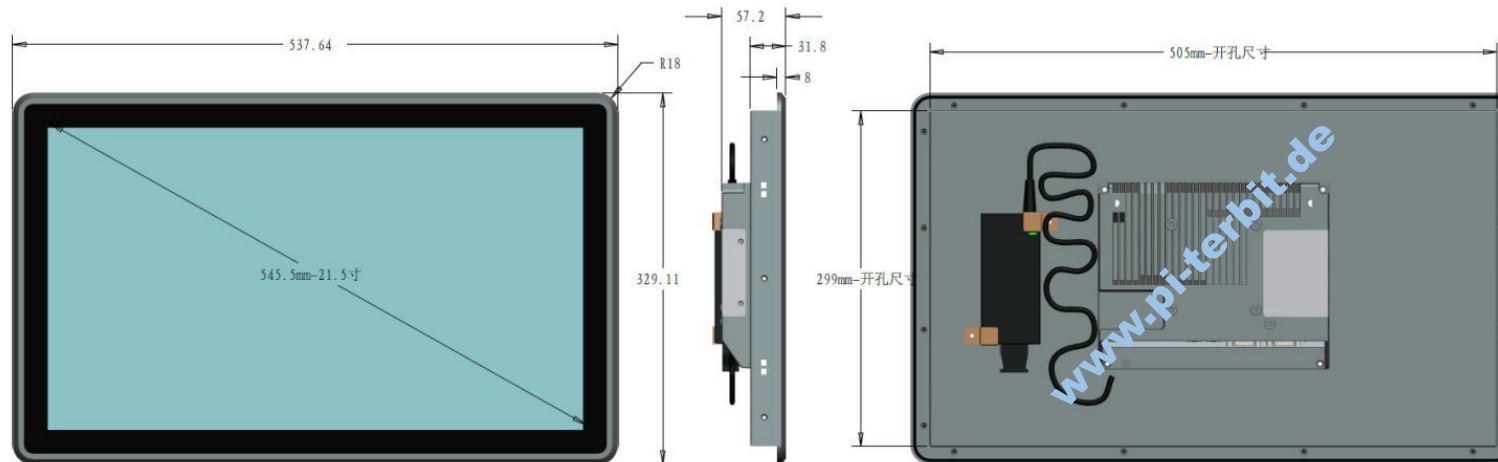


Order No.: terbit1246

- ➔ Hoch qualitatives Aluminium Gehäuse
- ➔ Lüfterloses Design
- ➔ 2.5" SSD/HDD und M.2
- ➔ 2 x COM ports, Optional RS-232/422/485
- ➔ 4 x USB 3.0 ports
- ➔ 2 x Intel I211 GbE LAN
- ➔ Eingangsspannung: DC 9-36V
- ➔ 21,4" 5-Draht resistiver Touch

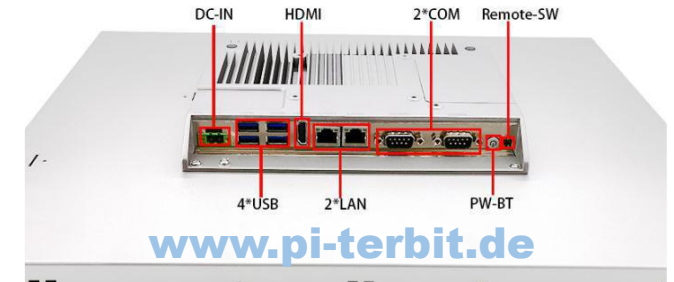

Order No.: terbit1246

## Spezifikation



|                         |  |
|-------------------------|--|
| CPU                     | Skylake, Kaby Lake, 6th Gen<br>Core i5 6200U<br>(2C/4T,2.30/2.80GHz,3MB Cache,15-25W)                      |
| RAM                     | DDR4 8GB onboard   |
| Grafic                  | Integrated Intel HD Graphics   |
| Network                 | 2xIntel i211AT 10/100/1000M Lan Network  |
| Storage                 | 1 x MSATA slot; 1 x 2.5" HDD; 1 x M.2 slot<br><b>(256GB SSD verbaut)</b>                                   |
| LCD                     | 21.5" TFT LCD Resolution 1920x1080, Brightness 350 cd/m <sup>2</sup>                                       |
| Screen                  | 5 wire resitance Touch   |
| Expansion               | 1 x mini PCIE port (support Wifi/mSATA)  |
| Front Interface         | 1 x HDMI, 4 x USB, 1 x 2PIN PX power Port, 2 x LAN, 2 x COM(RS-232/422/485), 1 x Power button              |
| Power                   | DC 9 ~ 36V Power input   |
| Dimensions(mm)          | 537,7 x 329,2 x 57,2 mm  |
| Temperatur&<br>Humidity | Operating Temp.: -20°C ~ 65°C<br>Storage Temp.: -40°C ~ 80°C<br>Env.humidity: 10%-95% @40°C Non-Condensing |
| OS                      | Windows 7/8/10, Linux  |